

HST THRESHOLDS

Decco thresholds are a ready-made and complete solution for HST construction. Thanks to their unique design they provide excellent thermal insulation, stabilisation, and easy assembly to the HST frame. Thresholds are available for a wide range of PVC systems and wooden structures

decco[®]
E X T R U S I O N

25 119



Master Step

www.inspiro.pl

84 MD

AMERICAN SYSTEMS

SHUTTERS

62

71

82

83

EURO+


HST

SLIDE

65

AQUATHERM

Master Step standard threshold

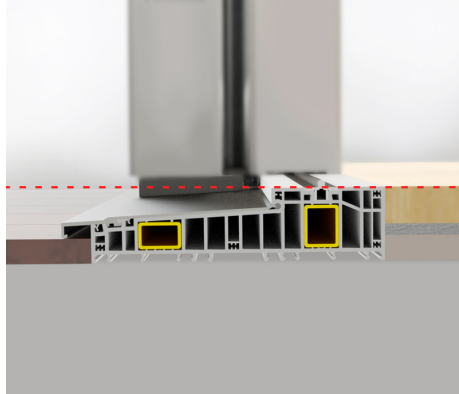


A classic solution for lift-and-slide systems.

Excellent thermal insulation provided by unique, 14-chamber design made of PVC. Stabilisation is guaranteed by the use of closed steel sections.

The one-piece design of the threshold is levelled with the frame edge, both externally and internally. Easy assembly to the HST frame is another of its many advantages.

Step Zero barrier-free threshold

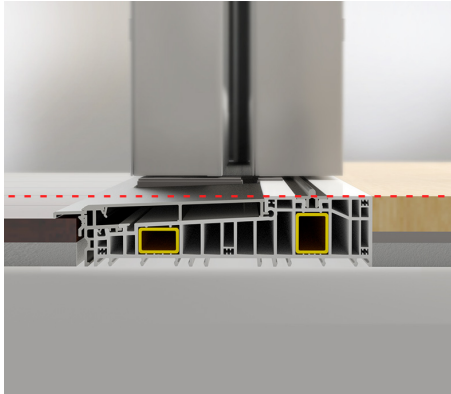


This is the barrier-free version. It provides an amazing comfort of use and minimalist design.

It has all the advantages of a Master Step threshold, and, in addition, it is virtually completely flat. An alignment pad combined with a 5 mm thick two running rail guarantee complete elimination of barriers.

It is a modern solution for the most demanding customers, which will prove its worth in every building - from houses private to public buildings. Meets the requirements of DIN 18040-2.

Step Arrivo low threshold with a height of 26 mm.

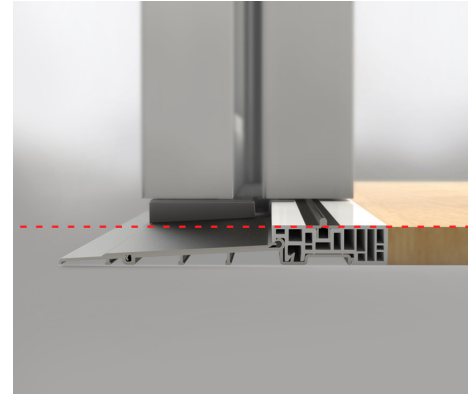

The solution used in southern regions of Europe. Provides a unique design.


Step Arrivo is a low threshold - its height is only 26 mm. Specially designed snap fasteners ensure rigid connection of PVC and aluminium elements.



**Waterproof
class 9A**



**Resistance to
wind load
class C2**



**Permeability
air class 4**

You can fit our thresholds to:

PVC

- Aluplast HST 85
- Salamander evolutionDrive HST
- HST Rehau Synego
- Gealan S 9000
- Vekaslide 82

TIMBER

- IV 78
- IV 88

Additional information:

- Maximum width: 6700 mm)
- Available rails: 5, 11, 13, 15 mm
- Widening available
with steel reinforcements
- PUR+XPS underframe

Thresholds available
for schemes A and C